



fi-7160 & fi-7260

Designed for workflow efficiency and built to last, the Fujitsu fi-7160 and fi-7260 scanners offer exceptional return on investment (ROI) through increased scanning speeds and reduced operator intervention.

Scanning Performance

With duplex scanning speeds of 120 images per minute at 300 dpi in Color, Grayscale, and Monochrome, the fi-7160 and fi-7260 protect your documents with acoustic sensors, ensure your data is captured with smart ultrasonic technology, and reduce rescans by cleaning up documents automatically in a single pass. Reliability is enhanced even further with new skew prevention technology for exceptional paper handling.

- Rapid power up time in less than 4 seconds.
- · Hard and embossed credit card scanning up to 1.4mm thick
- · Scan sticky notes, taped receipts, and labels while securing against multifeeds
- Long document support up to 18.3 feet in PaperStream IP
- · Latest USB 3.0 for forward compatibility
- 32/64 Bit Driver for PaperStream IP (TWAIN & ISIS)

Fleet Management

Bundled with fi-7160 and fi-7260, the Scanner Central Admin provides IT departments an efficient way to manage medium to large scanner deployments. With remotely

accessible fleet information, IT departments can now allocate resources effectively based on scan volume, consumable wear, depreciation schedules and maintenance expiration.



Included with Scanner

Fujitsu fi-7160 and fi-7260 scanners have everything needed to integrate with thousands of software applications in the market or with PaperStream Capture, an advanced yet easy to use scanning application provided in the box.

- PaperStream IP Image Cleanup (TWAIN & ISIS)
- PaperStream Capture batch scanning and PDF creation software
- One-year Advance Exchange Limited Warranty

Accessories & Options

The following options are available for purchase:

- . Training & Installation to get the most out of the equipment
- Advanced Exchange Warranties in multi-year bundles
- ScanAid Kit with consumables and cleaning supplies
- fi-7160 Post-Imprinter for backside endorsing
- Black Background for fi-7260 flatbed auto-cropping
- · Carrier Sheet for double letter stitching

For full details on the Limited Warranty and other service programs, please go to www.lmagingService.com or call (800) 626-4686.











| Models | | | fi-7160 (ADF only) / fi-7260 (ADF+Flatbed) | | | | |
|--|--------------------------------|---|---|--|--|--|--|
| Image Sensor Type | | | Color CCDs (Color Charge Coupled Device) | | | | |
| Light Source | | | White LED Array | | | | |
| Optical Resolution | | | 600 dpi | | | | |
| Output Resolution ¹ | Grays | (24 bit) scale (8 bit) schrome | 50 to 600 dpi, 1200 dpi ² | | | | |
| Output Color Depth | | | Color: 24-bit; Grayscale: 8-bit; Monochrome: 1-bit | | | | |
| Internal Video Processing | | | 65536 levels (16-bit) | | | | |
| Image Processing Function | | | Hardware Software | Multi-image, Blank page skip, i-DTC, Advanced-DTC, Simplified-DTC, sRGB, Auto color, Deskew cropping, Punch | | | |
| Performance | , | | | | | | |
| Scanning Spo (A4, Portrait) | 3 Gr | olor ⁴ , ayscale ⁴ , | ADF | | Simplex: 60 ppm, Duplex: 120 ipm (200dpi/300 dpi) | | |
| ADE 0 | | onochrome | Flatbed (fi-7260) 1.7 seconds (200 dpi) | | | | |
| ADF Capacity | | | 80 Sheets (Letter 20 lb. or A4: 80 g/m²) | | | | |
| Dogument | | inimum | 2 x 2.13 in. (50.8 x 54 mm) | | | | |
| Document size | ADF maximum ⁶ | | 8.5 x 14 in. (216 x 355.6 mm) | | | | |
| - | Long document | | 8.27 x 220 in. (18.3') (210 x 5,588 mm) ⁷ | | | | |
| ADE E " | Flatbed (fi-7260) Letter | | 8.5 x 11.69 in. (216 x 297 mm) | | | | |
| ADF Feeding Paper Weight | _ | tter 3 sheets | 7.2 to 110 lb. (27 to 413 g/m²) 34 to 56 lb. (127 to 209 g/m²) | | | | |
| (Thickness) | | | Up to 1.4 mm (portrait / landscape) ⁹ | | | | |
| Interface | (· · · · · · ·) Ouru | | | USB 3.0 (backward compatible) | | | |
| Physical Sp | ecificat | tions | 1 002 0.0 (b | | | | |
| | | | 100 to 240VAC ±10% | | | | |
| Power requirements Power consumption (Operating) | | fi-7160 | 38 W or less (Sleep: 1.8 W; Standby: 0.35 W) ¹⁰ | | | | |
| | | fi-7260 | 41 W or less (Sleep: 1.8 W; Standby: 0.35 W) 10 | | | | |
| Dimensions | | fi-7160 | 11.8 x 6.7 x 6.4 in. (300 x 170 x 163 mm) | | | | |
| (WxDxH) 11 | | fi-7260 | 11.8 x 22.7 x 9.2 in. (300 x 577 x 234 mm) | | | | |
| M/alaba | | fi-7160 | 9.26 lb. (4.2 kg) | | | | |
| Weight | | fi-7260 | 19.4 lb. (8.8 kg) | | | | |
| Environmenta | Environmental compatibility 12 | | ENERGY STAR® / RoHS / EPEAT Silver | | | | |
| Operating | | erature | 42° to 95° F (5° to 35° C) | | | | |
| Environment | Relative humidity | | 20% to 80% (non-condensing) | | | | |
| Inbox Contents | | | ADF paper chute, AC cable, AC adapter, USB cable, Setup DVD-ROM, Getting Started Guide | | | | |
| Bundled Software | | | PaperStream IP (TWAIN/ISIS) Driver, Software Operation Panel, Error Recovery Guide, PaperStream Capture, ScanSnap Manager for fi Series, Scan to Microsoft SharePoint, ABBYY FineReader for ScanSnap, Scanner Central Admin Agent. | | | | |
| Options | | | Post-scan Imprinter (fi-7160 only), Carrier Sheet, Black Document Pad (fi-7260 only) | | | | |
| OS Support | | | Windows® 8 (32-bit/64-bit), Windows® 7 (32-bit/64-bit), Windows Vista® (32-bit/64-bit), Windows XP® (32-bit/64-bit), Windows Server® 2008 (32-bit/64-bit), Windows Server® 2012 (64-bit) | | | | |
| Feed Detection Features | | | Ultrasonic Double Feed Detection Sensor, Acoustic Paper Protection Sensor, Intelligent Multi-Feed Function (Manual Bypass) | | | | |
| Other Features | | | Embossed Card Scanning Capability, Long Document Scanning, Scanner Central Admin management, USB 3.0 Support, Acoustic Paper Protection, Automatic: Color Recognition, Paper-Size Detection, De-skew Correction | | | | |
| Limited Warranty | | | One-year. Advance Exchange program also available; restrictions apply. For full details, visit www.lmagingService.com or call (800) 626-4686. | | | | |
| Service Options | | | Post-Warranty: Advance Exchange Plus; restrictions apply. Consumables: ScanAid™ kit. For full details, visit www.lmagingService.com or call (800) 626-4686 | | | | |
| Part Number | | fi-7160 | PA03670-B055 | | | | |
| T all Nulliber | | fi-7260 | PA03670-F | 3555 | | | |

fi-7160 (ADE only) / fi-7260 (ADE_Elathed)

1 Maximum output resolutions may vary, depending upon the size of the area being scanned and whether the scanner is scanning in simplex or duplex. 2 Scanning limitations brought about by scanning mode, document size and available memory may occur when scanning at high resolutions (600dp or higher). 3 Actual scanning speeds are affected by data transmission and software processing times. 4 JPEG compressed figures. 5 Maximum capacity varies, depending upon paper weight. 6 Document sizes larger than A4, but not exceeding A3, can be scanned (single-side) using an optional carrier sheet. 7 The scanning of documents that exceed 34 inches in length will be limited to using PaperStream IP at 200 dpi or less, 300 dpi is 215 inches. 8 Supports ISO7810 embossed cards. 9 Capable of scanning by 03 cards at a time. (Note: does not support multi-embossed card feeding.) 10 fi-7160 only. 11 Excluding the ADF paper chute and stacker. 12 PFU Limited, a Fujitsu company, has determined that this product meets RoHS requirements (2002/95/EC).



fi-7260

Technical Specifications




PA03670-B555

This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. This product is a green product and Fujitsu promotes recycling for the scanner. Users are solely responsible for how they use this scanner. It is imperative that users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.

Fujitsu Computer Products of America, Inc. 1250 East Arques Avenue Sunnyvale, CA 94085-4701 (800) 626-4686 (408) 746-6000 • info@fcpa.fujitsu.com • http://us.fujitsu.com/fcpa





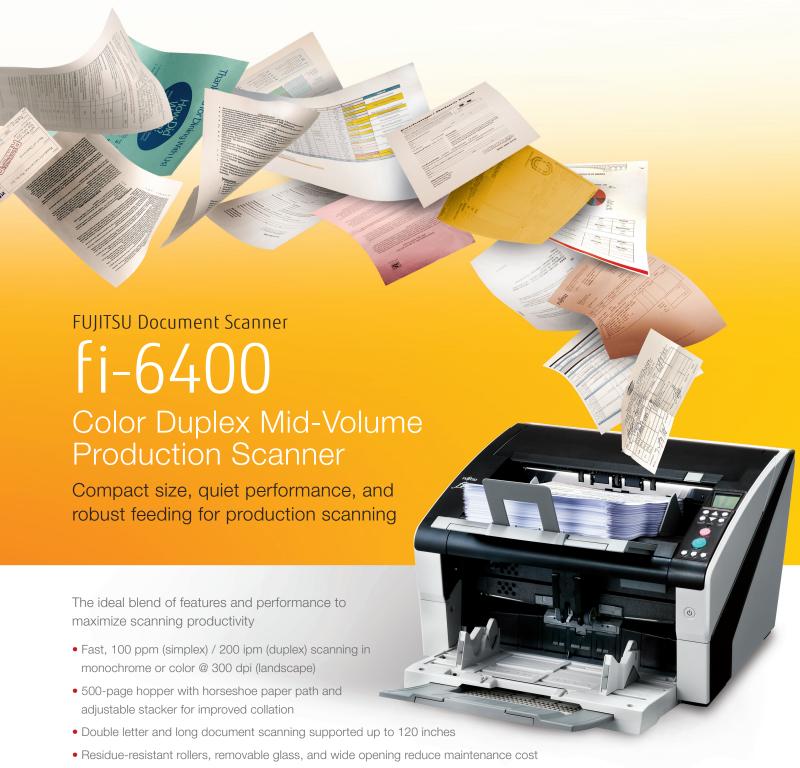

- Intelligent Multi-Feed Function increases daily throughput
- Advanced Image Cleanup with PaperStream TWAIN & ISIS Drivers
- Easy-to-use PaperStream Capture software for batch scanning
- Toll-Free, U.S.-based Fujitsu technical support
- Eco-friendly white LED array
- Scanner Central Admin software for volume and asset tracking
- Sturdy frame for large duty cycles year after year



fi-6400

The Fujitsu fi-6400 Mid-Volume Production Scanner includes a wide range of features specifically created to enhance productivity and maximize efficiency.

Scanning Performance

With duplex scanning speeds of 200 images per minute at 300 dpi in color, grayscale, and monochrome, the fi-6400 performs up to 30,000 scans per day with a small design, made with minimized height for paper loading ease. Discover these other important features:

- · Proven paper feeding for very thin and thick paper
- Long consumable life at 600,000 scans to provide cost savings
- Scan sticky notes, taped receipts, and labels while securing against multi-feeds
- LCD tracking of batches and daily counts for quick reference
- · Paper separation controls for sticky pages and humid environments
- · Adjustable hopper height to increase smaller batch processing
- Quiet operation at 55 decibels for comfortable work environments
- Stacker adjusts height and paper speed to reduce document reorganization

Fleet Management

Bundled with fi-6400, the Scanner Central Admin provides IT departments an efficient way to manage scanner deployments. With remotely accessible fleet information, IT departments can now allocate resources effectively based on scan volume, consumable wear, depreciation schedules and maintenance expiration.

Included with Scanner

The Fujitsu fi-6400 scanner has everything needed to integrate with hundreds of software applications or with PaperStream Capture, a powerful yet easy-to-use scanning application provided free in the box.

- PaperStream TWAIN and ISIS image cleanup
- · PaperStream Capture batch scanning and PDF creation software
- 90-day on-site limited warranty

Accessories & Options

The following options are available for purchase:

- Training & Installation to get the most out of the equipment
- On-site Extended Warranties with next-day, 4 hour, and 24/7 response
- ScanAid Kit with consumables and cleaning supplies
- Front and back side post imprinters for paper endorsing

About Fujitsu Computer Products of America, Inc.

Fujitsu Computer Products of America, Inc., a subsidiary of Fujitsu Ltd., is an established leader in the Document Imaging industry, delivering innovative scanning solutions and services that enable our customers to solve critical business productivity issues and streamline operations. We provide cutting-edge document capture and workflow solutions for business and personal environments, backed by a comprehensive portfolio of service and support programs.

| Functional Specifications | | | | | | | |
|--|-------------------|--|--|--|--|--|--|
| Model | | | fi-6400 | | | | |
| Image Sensor Type | | | Color CCD (Charge-coupled device) x 2 (front x 1, back x 1) | | | | |
| Output resolution ⁵ Color: (24-bi | | t), Grayscale: (8-bit), e: (1-bit) ⁵ | 50 to 600dpi, 1200dpi ^{10, 11} | | | | |
| Halftone Patterns | | | 4 Dither Patterns and error diffusion | | | | |
| Grayscale | | | 10-bit/1,024 level (internal), 8-bit/256 level (output) | | | | |
| Color | | | 24-bit single pass color | | | | |
| Paper weight (Thickness) | | | Less than A5 size: 0.050 mm to 0.25 mm (41 to 209g/m2, or 11 to 56 lb) A4 to A5 size: 0.025 mm to 0.25 mm (20 to 209 g/m2, or 5.4 to 56 lb) Over A4 size: 0.050mm to 0.25 mm (41 to 209 g/m2, or 11 to 56 lb) | | | | |
| Scanning speeds | | Portrait 1 | $85~\text{ppm}^{2}$ Color/Greyscale 170 ipm 2 (200 or 300 dpi, Letter, Color, Grayscale and Monochrome) 3 | | | | |
| | Landscape 1 | | 100 ppm ² Color/Greyscale 200 ipm ² (200 or 300 dpi, Letter, Color, Grayscale and Monochrome) ³ | | | | |
| Scanning Mode | | | Simplex and Duplex | | | | |
| Document Fee | ding | Mode | Automatic document feeder (ADF) | | | | |
| ADF Capacity 4 | | | 500 Sheets (A4: 80 g/m² or 20 lb.) | | | | |
| Daily Duty Cycle | | 30,000 Pages | | | | | |
| Document | AD | F maximum | A8 Portrait (52 mm x 74 mm or 2 in. x 3 in.) | | | | |
| Size | ADF minimum | | A3 Portrait (297 mm x 420 mm or 11.7 in. x 16.5 in.), Double letter (279.4 mm x 431.8 mm or 11 in. x 17 in.) | | | | |
| Interface ⁶ | | | USB2.0/USB1.1 (Selectable) | | | | |
| JPEG Compression | | | Hardware real time JPEG compression available | | | | |
| Power Requirements (auto-switching) | | | 100 to 240 VAC, 50/60 Hz | | | | |
| Power Consumption | | | 200 W or less | | | | |
| Operating Environment | Temperature | | 15 ° C to 35 ° C (59 ° F to 95 ° F) | | | | |
| | Relative Humidity | | y 20 % to 80 % (non-condensing) Not operating: 8 % to 95 % | | | | |
| Dimensions (HxWxD) 7 | | | 460 mm x 430 mm x 310 mm (18.1 in. x 16.9 in. x 12.2 in.) | | | | |
| Weight | | | 32 kg (70.5 lb) | | | | |
| Inbox Contents | | | AC cable, USB cable, Setup DVD-ROM, 2D Barcode for PaperStream Setup CD-ROM | | | | |
| Bundled Software (DVD format) | | | PaperStream IP (TWAIN/ISIS) Driver, 2D Barcode for PaperStream, Software Operation Panel, Error Recovery Guide, PaperStream Capture, Scanner Central Admin | | | | |
| Environment Compatibility 8 | | | ENERGY STAR®, RoHS, EPEAT Silver | | | | |
| Options | | | Post Imprinter (Front-side) and Post Imprinter (Back-side) | | | | |
| OS Support | | | Windows® 8 / 8.1 (32-bit/64-bit), Windows® 7 (32-bit/64-bit), Windows Vista® (32-bit/64-bit), Windows XP® (32-bit/64-bit), Windows Server® 2012 (64-bit), Windows Server® 2012 R2 (64-bit), Windows Server® 2008 (32-bit/64-bit), Windows Server® 2008 R2 (64-bit) | | | | |
| Features | | | Ultrasonic Intelligent MultiFeed Function Double Feed Detection (3x) and Long Document Scanning ⁹ | | | | |

- 1 Actual scanning speeds are affected by data transmission and software processing times
- 2 JPEG compressed figures.
- 3 Intel® Core™ i5 desktop processor 2.5 GHz or higher, 4 GB RAM is recommended.
- 4 Maximum capacity varies, depending upon paper thickness.
- **5** Maximum output resolutions may vary, depending upon the size of the area being scanned and whether the scanner is scanning in simplex or duplex.
- **6** You cannot connect multiple computers to the scanner using each type of interface cables at the same time.
- 7 Excluding the ADF hopper.
- 8 PFU Limited, a Fujitsu company, has determined that this product meets RoHS requirements (2005/95/EC)
- **9** Capable of scanning documents that exceed A4 sheets in length. However, the scanning of documents that exceed 863 mm (34 in.) in length will be limited to using 300 dpi or less.
- 10 Software interpolated.
- 11 Scanning limitations brought about by scanning mode, document size and available memory may occur when scanning at high resolutions (600 dpi or higher).

















Fujitsu Computer Products of America, Inc.

http://us.fujitsu.com/fcpa 1250 East Arques Avenue Sunnyvale, CA 94085-5401 Sales: (888) 425-8228, Tech Support: (800) 626-4686 info@fcpa.fujitsu.com

This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. This product is a green product and Fujitsu promotes recycling for the scanner. Users are responsible for how they use this scanner. It is imperative that users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.





©2015 Fujitsu Computer Products of America, Inc. All rights reserved. Fujitsu and the Fujitsu logo are registered trademarks of Fujitsu Limited. Microsoft, SharePoint, Windows and Vista are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. ISIS is a registered trademark of Potel Translations, a division of Captiva Software Corporation. Paper-Stream is a registered trademark of PPU LIMITED Japan. ABBYY, FineReader are trademarks of ABBYY Software House. As an ENERGY STAR® Patters, Fujitsu Ltd. has determined that this product meets the ENERGY STAR® guidelines for energy efficiency. ENERGY STAR® is a U.S. registered trademark. All other trademarks are the property of their respective owners. All statements herein are valid only in the U.S. reserves the right to modify at any time without prior notice these statements, our products of America, Inc. reserves the right to modify at any time without prior notice these statements, our products, their performance specifications, availability, price and warranty, post-warranty and service programs. Printed in the U.S.A. 150306XR0